




MGF

All models excluding Trophy 160

TRACKING TRIM

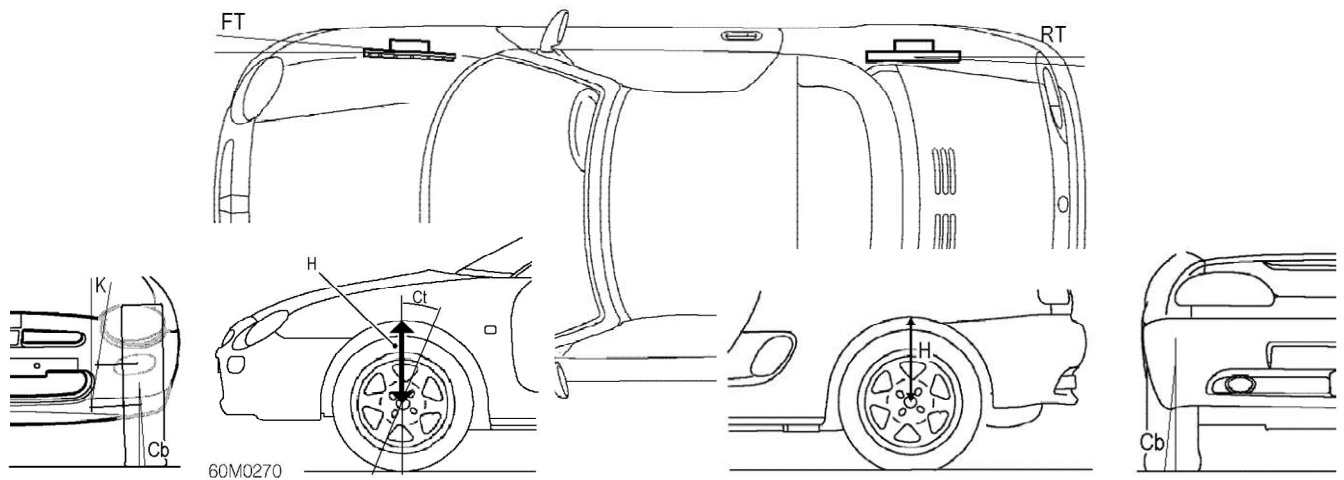

Front Axle

		Standard (Black bushes)	Upated (Blue Bushes)	Track only (Orange bushes)
Ride Height	(H)	368 mm ± 10 mm	368 mm ± 10 mm	368 mm ± 10 mm
Toe (per wheel)	(FT)	- 0°10' ± 06'	- 0°05' ± 06'	- 0°00' ± 03'
Camber	(Cb)	- 0°30' ± 30'	- 0°30' ± 15'	- 0°30' ± 15'
Castor	(Ct)	+ 5° ± 55'	+ 5° ± 55'	+ 5° ± 55'
King Pin Inclination	(K)	+ 11°40'	+ 11°40'	+ 11°40'
Steering Angle (Inner Wheel)	(I)	29°12'	29°12'	29°12'
Steering Angle (Outer Wheel)	(O)	34°42'	34°42'	34°42'

Rear Axle

		Standard (Black bushes)	Upated (Blue bushes)	Track only (Orange bushes)
Ride Height	(H)	363 mm ± 10 mm	363 mm ± 10 mm	363 mm ± 10 mm
Toe (per wheel)	(RT)	+ 0°10' ± 06'	+ 0°10' ± 06'	+ 0°10' ± 03'
Camber	(Cb)	- 1°00' ± 30'	- 1°00' ± 30'	- 1°00' ± 30'